

## DLM-28/36 ESSENTIAL TUMBLE DRYERS



### M PROGRAMMER

New M programmer: push buttons to control temperature and time



### OUTSTANDING FEATURES

Reversing drum action as standard  
Frequency inverter as standard  
Galvanized drum as standard



### EFFICIENCY

Big fluff filter



### VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



### ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters  
Opening sense of door adjustable on site



### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console



### OTHERS

White painted panels  
COOL DOWN - anti-wrinkle at the end of the cycle  
Heating options: electric, gas and steam  
CE approved




### OPTIONS

- M programmer display
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA		UNIT.	DLM-28 ESSENTIAL		DLM-36 ESSENTIAL	
<b>CAPACITY</b>						
Capacity 1/18		Kg	31		37	
Capacity 1/20		Kg	28		33	
Hourly Output ESSENTIAL *		Kg/h	56-53		70-65	
Evaporation capacity ESSENTIAL *		l/h	30,9		32,10	
<b>DRUM</b>						
Ø Drum		mm	947		947	
Ø Door		mm	802		802	
Door center height		mm	1040		1040	
Load hole bottom height		mm	640		640	
Drum length		mm	780		936	
Drum volume		l	550		660	
<b>POWER</b>						
Drum motor power		Kw	0,55		0,55	
Fan motor power ESSENTIAL		Kw	0,55		0,55	
Electric heating power ALL RANGES		Kw	30		36	
Total electric power (elec.model) ESSENTIAL		Kw	31,15		37,15	
Gas heating power ALL RANGES		Kw	41		41	
Total electric power (gas model) ESSENTIAL		Kw	1,15		1,15	
<b>CONNECTIONS</b>			<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T		Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T		Nº x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T		Nº x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet		BSP				
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Net width / Gross width		mm	985 / 1065		985 / 1065	
Net Depth / Gross Depth		mm	1054 / 1154		1210 / 1310	
Net Height / Gross Height		mm	1975 / 2080		1975 / 2080	
Height without heating battery		mm	-		-	
Net weight / Gross weight		Kg	230 / 260		260 / 285	
<b>OTHERS</b>						
Max airflow ESSENTIAL		m3/h	1200		1200	
Ø Fume exhaust		mm	200		200	
Sound level ESSENTIAL		dB	65		65	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

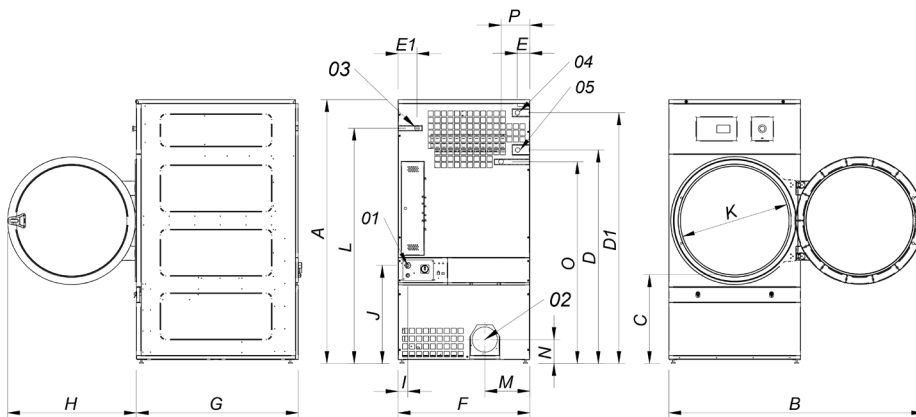

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OULET 1"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DLM-28	1975	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	1510	215
DLM-36	1975	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	1510	215