

DTM-11/14 COMFORT TUMBLE DRYERS



M PROGRAMMER

New M programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console



OTHERS

Grey skinplate outer casing, stainless steel look
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Heating options: electric, gas and steam
CE approved




OPTIONS

- M programmer display
- Double doorglass
- Reverse door opening
- Rear panel external air + filter
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steel steam battery
- Low pressure steam battery
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Wooden packing
- Ship voltage for electric models:
- 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTM-11 COMFORT		DTM-14 COMFORT	
CAPACITY					
Capacity 1/18	Kg	12		15	
Capacity 1/20	Kg	11		13,5	
Hourly Output COMFORT*	Kg/h	23-21		34-30	
Evaporation capacity COMFORT*	l/h	14,5		15,40	
DRUM					
Ø Drum	mm	750		750	
Ø Door	mm	574		574	
Door center height	mm	976		976	
Load hole bottom height	mm	689		689	
Drum length	mm	475		610	
Drum volume	l	210		270	
POWER					
Drum motor power	Kw	0,37		0,37	
Fan motor power COMFORT	Kw	0,25		0,25	
Electric heating power ALL RANGES	Kw	12		18	
Total electric power (elec.model) COMF	Kw	12,67		18,67	
Gas heating power ALL RANGES	Kw	20,51		20,51	
Total electric power (gas model) COMF	Kw	0,67		0,67	
Steam heating power ALL RANGES	Kw	30		30	
Steam heating power (gas model) COMF	Kw	0,67		0,67	
CONNECTIONS					
Tension 230V - I + N + T	Nº x mm2 / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4x16 /63A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5x10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1074	
Net Height / Gross Height	mm	1.694 / 1.840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190	
OTHERS					
Max airflow COMFORT	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level COMFORT	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

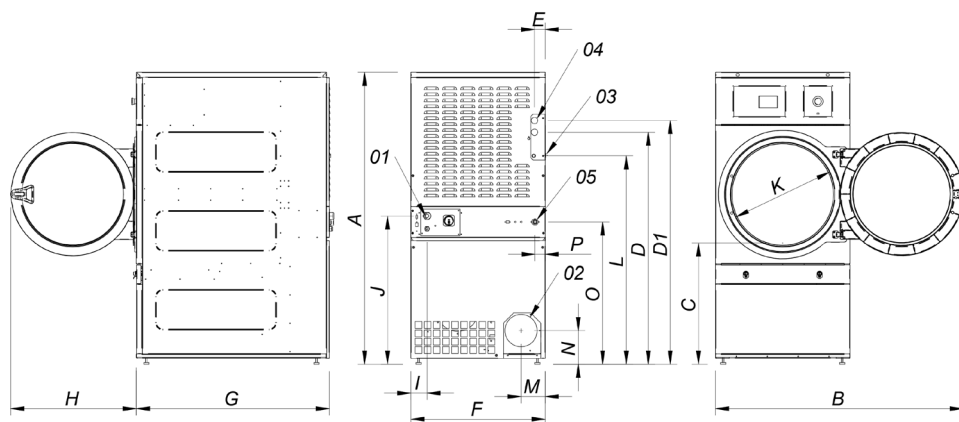

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DTM-11	1694	1447	689	1354	1422	68	68	785	855	735	95	870	575	1226	133	180	830	65
DTM-14	1694	1447	689	1354	1422	68	68	785	989	735	95	870	575	1226	133	180	830	65