

# DTT2-11/18 STACK DYNAMIC TUMBLE DRYERS



## TOUCH II

User friendly and totally programmable 7" Touch II USB Connection. PC software free of charge for programming, traceability, data analysis... Videos on display (ads, instructions, etc.) 37 languages



## OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard.  
New **TURBO** gas heated model: more power to achieve more productivity.



## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter



## VERSATILITY

Make to order - customisation  
WET CLEANING  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



## CONNECTIVITY

IoT- Domus Connect  
Management of laundries: OPL and COIN  
Remote payment (coin-laundry)



## ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters



## MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



## OTHERS

Grey skinplate outer casing, stainless steel look  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Heating options: electric, gas  
CE approved




## OPTIONS

- EFFICIENT DRY - Intelligent humidity control. Temperature probe at drum inlet.
- Double door glass
- SFEX - Integrated Fire Extinguishing System
- DomusConnect communication kit - IoT
- Tropicalized model
- Rear panel external air + filter
- Stainless steel outercasing
- Stainless steel frontal panel
- Stainless steel battery
- Wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	DTT2-11	DTT2-18		
<b>CAPACITY</b>					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	2x14 - 2x13	2x21 - 2x20		
Evaporation capacity*	l/h	16,5	25,50		
<b>DRUM</b>					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
<b>POWER</b>					
Drum motor power	Kw	0,37x2	0,37x2		
Fan motor power STACK DYNAMIC	Kw	0,25x2	0,25x2		
Electric heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (elec.model) STACK DYNAMIC	Kw	25,34	25,34		
Gas heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (gas model) STACK DYNAMIC	Kw	1,34	1,34		
<b>CONNECTIONS</b>		<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	785 / 865		784 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	Kg	260 / 268		290 / 303	
<b>OTHERS</b>					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

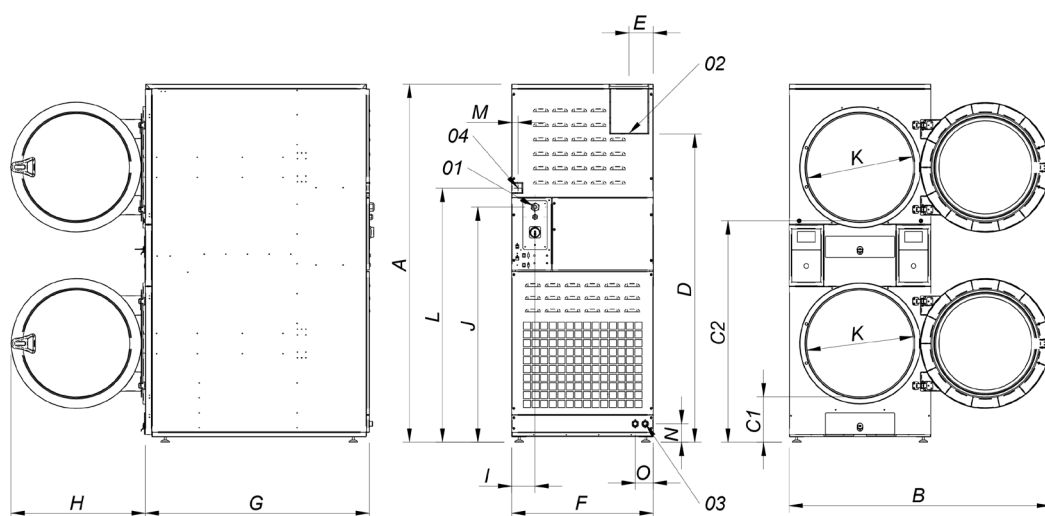

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTPUT Ø200
- 03 2 SPRINKLER VALVES 3/4"
- 04 GAS INLET 1/2"

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
DTT2-11	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	103	100
DTT2-18	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	103	100