

WALL IRONERS PR-1025-1225-1425-2025



ELECTRONIC PROGRAMMER

Electronic microprocessor with digital screen which allows to easily control the ironing temperature of the machine.

Preset ironing speeds, not adjustable



EFFICIENCY

Minimum space requirement: space saving, suitable for small spaces

Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...



ROBUSTNESS

Nomex coating: resistant to high temperatures
Panels in skinplate. Top panels in stainless steel.

New kinematics: better reliability

Industrial roll axle and bearings: more durable



FEATURES

Large roll contact area with the linen

Automatic roll lifting control by foot cell detection

Two available models:

Standard: roll with cotton polyester coating

Nomex: roll with Nomex coating



MAINTENANCE

Easy installation : requires only an electrical connection

Easy access on both sides for maintenance

Quick and easy dismantling of bearings



OTHERS

Irons flat linen with recommended relative moisture between 5 and 10 % from a tumble dryer

Front feeding and return.

Fingerguard.

Chest in anodized aluminium.

Roll ø 250 mm


Working widths: 1.000, 1.200, 1.400 and 2.000 mm

Electric heating

CE certification


OPTIONS

- Pedal control instead of photocell
- Tension 440V III 60 Hz No N (marine)
- Tension 230V III 50-60 Hz
- Tension 230V I +N 50Hz (N/A for PR-2025)

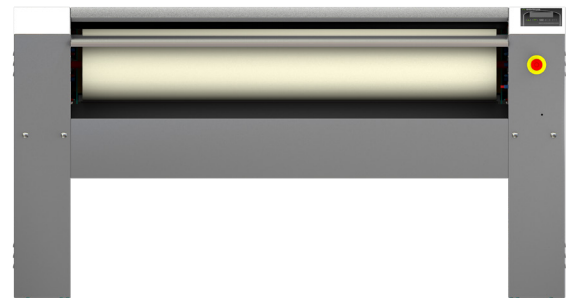

TECHNICAL DATA	UNIT.	PR-1025	PR-1225	PR-1425	PR-2025
GENERAL DATA					
Theoretical production*	Kg/h	30	35	40	55
Ø Roll	mm	250	250	250	250
Working width	mm	1.000	1.200	1.400	2.000
Ironing speed	mt/min	4,2	4,2	4,2	4.2
Electronic programmer	-	Yes	Yes	Yes	Yes
Bed lifting	-	Auto	Auto	Auto	Auto
POWER					
Heating power	Kw	4,95	6	7	12
Roll motor power	Kw	0,18	0,18	0,18	0,18
Total electric power	Kw	5,13	6,18	7,18	12,18
CONNECTIONS ELECTRIC		ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
Tension 230V - I + N + T	N° x mm²/A	3 x 6 / 25A	3 x 6 / 32A	4 x 10 / 40A	N/A
Tension 230V - III + T	N° x mm²/A	4 x 2,5 / 16A	4 x 4 / 20A	4 x 4 / 20A	4 x 4 / 20A
Tension 400V - III + N + T	N° x mm²/A	5 x 2,5 / 10A	5 x 2,5 / 10A	5 x 2,5 / 16A	5 x 2,5 / 16A
DIMENSIONS / PACKING DIMENSIONS					
Net width/ Gross width	mm	1.462 / 1.490	1.662 / 1.690	1.862 / 1.890	2462 / 2490
Net depth/ Gross depth	mm	484 / 540	484 / 540	484 / 540	484 / 540
Net height/ Gross height	mm	985 / 1.130	985 / 1.130	985 / 1.130	985 / 1130
Net weight/ Gross weight	Kg	114 / 124	124 / 134	134 / 154	164 / 184
Volume	m3	0,69 / 0,91	0,79 / 1,03	0,89 / 1,15	1,17 / 1,51
OTHERS					
Sound Level	dB	55	55	55	55

*20 %-25 % moisture

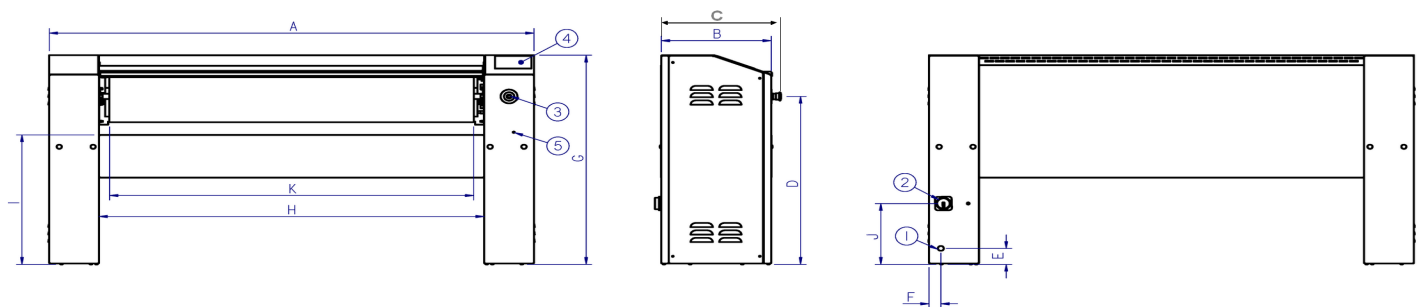

- 01. Electrical connection
- 02. Main switch
- 03. Emergency stop
- 04. Control panel
- 05. access to inverter maintenance

	A	B	C	D	E	F	G	H	I	J	K
PR-1025	1.462	423	484	791	75	45	985	1.079	610	287	998
PR-1225	1.662	423	484	791	75	45	985	1.279	610	287	1.198
PR-1425	1.862	423	484	791	75	45	985	1.479	610	287	1.398
PR-2025	2.462	423	484	791	75	45	985	2.079	610	287	1.998