

## COMPACT FLATWORK IRONERS

### SP - Ø600mm

#### FEATURES

SP model dries and irons and is equipped with a lengthwise folder making up to two length folds

- Roll dimensions: working width 2m60 and 3m30, diameter 600 mm.
- 1 or 2 length folds in 2 independent lanes
- Folding by photocells and compressed air
- Frequency control.
- Feeding and ironing by Nomex quality belts.
- Panels in painted steel.
- One or two working lanes: one lane for bedsheets and two lanes for tablecloths and small pieces.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with speed control (between 3 and 18 m/min) temperature and folding parameters.
- Electric, gas or steam heating
- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar
- Automatic stop after cooling down (at 80°C).


#### OPTIONS

- 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass, standard height 610mm
- Motorized rear exit, height 870 mm
- Small pieces 2 lanes back collector
- Small pieces 4 lanes back collector
- By-pass folder
- Double air pressure in length folds for thicker linen
- Linen reject system
- Crossfolder + stacker (1 lane)
- Different voltage from 400V III + N 50Hz



TECHNICAL DATA	UNIT.	SP-260/60	SP-330/60
GENERAL DATA			
Theoretical production humidity*	Kg/h	75-105*	110-140*
Ø Roll	mm	600	600
Working width	mm	2.600	3.300
Height of feeding	mm	1.050	1.050
Ironing speed	mt/min	3-10	3-10
Control type	-	Digital	Digital
Nº of programmes	Nº	20	20
FOLDING			
1 lane - lengthfold	Nº	1-2	1-2
1 lane - crossfold	Nº	-	-
2 lanes - lengthfold	Nº	1-2	1-2
2 lanes - crossfold	Nº	-	-
POWER			
Electric heating	kW	54	54
Max. electric power electric heating	kW	55,9	55,9
Gas heating (natural / LPG)	kW	63,30 / 67,40	80,30 / 86,30
Max. electric power gas heating	kW	1,9	1,9
Steam heating	kW	55	75
Max. electric power steam heating	kW	1,9	1,9
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet (12 bar max.)	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Net width / gross width	mm	3.670 / 3.830	4.370 / 4.530
Net depth / gross depth	mm	1.440 / 1.620	1.440 / 1.620
Net depth / gross depth	mm	2.030 / 1.960	2.030 / 1.960
Net weight / gross weight	Kg	2.050 / 2.300	2.300 / 2.600
Volume	m3	10,73 / 12,16	12,77 / 14,38
OTHERS			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	120	120
Extraction rate	m3/h	2 x 1.000	2 x 1.000
Compressed air consumption (6,5 bar)	NI/h	7.000	7.000
Sound Level	dB	70	70

\*50% residual moisture, 140gr / m2 of cotton,  
100% roll utilization

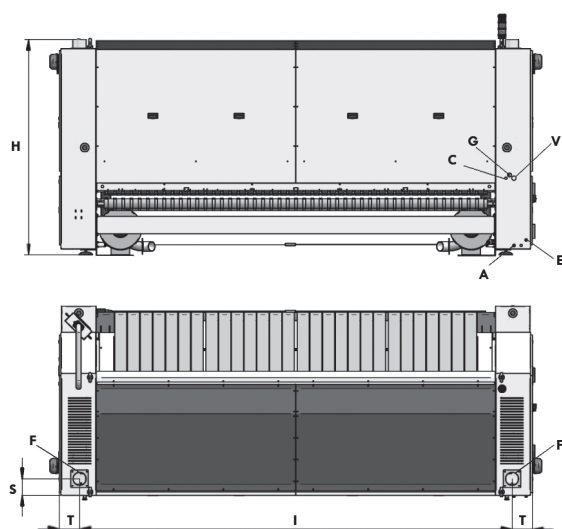

- A. Compressed air inlet
- C. Condensation discharge (steam models)
- E. Electric connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V
CE2660	1.800	3.242	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"
CE3360	1.800	3.942	186	152	Ø 12	1/2"	5 x 2,5	Ø 120	1"	1"