

COMPACT FLATWORK IRONERS SPE - Ø800mm

FEATURES

SPE models are the most complete models that dry, iron and fully fold (length and cross) in 1 or 2 lanes. They can be equipped with a stacker as option: 2 models available.

- Roll dimensions: working width 2m60 and 3m30, diameter 800 mm.
- 1 or 2 working lanes : one lane for bedsheets and two lanes for tablecloth and small pieces.
- Length fold (1 or 2 folds) and crossfold (up to 3 folds).
- Folding by photocells and compressed air
- Two types of stacker, with possibility to program the number of stacked items. The stacker can be located on either side of the machine.
- Frequency inverter.
- Feeding and ironing by Nomex quality belts.
- Panels in painted steel.
- Polished steel roll with fingers guard.
- Touch screen control: programs can be created with speed control between 3 and 18 m/min and temperature.
- Electric, gas or steam heating
- Two versions for gas heated models:
 - gas with atmospheric burners,
 - gas with radiant burners

• 25 % gas consumption savings and 25 % more production

- Powerful exhaust system
- Compressed air connexion required: pressure 6,5 bar


OPTIONS

- Automatic 1 lane automatic clamp feeder with vacuum table
- Vacuum table
- Rear exit with by-pass standard height 860mm
- Small pieces 2 lanes back collector + by-pass
- Small pieces 4 lanes back collector + by-pass
- Double air pressure in length folds for thicker linen
- Linen reject system
- Compact stacker (Roll-off): it can stack up to 5 tablecloth, 10 bedsheets
- Stacker: it can stack up to 10 - 15 tablecloth, 10 bedsheets
- Different voltage from 400V III + N 50Hz
- Remote service
- Maintenance kit for ironers




TECHNICAL DATA	UNIT.	SPE - 260/80	SPE - 330/80
GENERAL DATA			
Theoretical production humidity*	Kg/h	140-175*	180-220*
Ø Roll	mm	800	800
Working width	mm	2.600	3.300
Height floor-feeding	mm	1.050	1.050
Working speed	mt/min	3-13	3-13
Control type	-	Digital	Digital
Programmes	Nº	20	20
Side stacker	Nº	Opt	Opt
FOLDING			
1 lane - Primary fold	Nº	1-2	1-2
1 lane - Cross fold	Nº	1-2-3	1-2-3
2 lanes - Primary fold	Nº	1-2	1-2
2 lanes - Cross fold	Nº	1-2	1-2
POWER			
Heating power (electric model)	kW	72	72
Total electric power (electric model)	kW	75,5	75,5
Heating power (gas model)	kW	86,95 / 91,70	124,70 / 124,10
Total electric power (gas model)	kW	3,5	3,5
Heating power (steam model)	kW	85	110
Total electric power (steam model)	kW	3,5	3,5
CONNECTIONS			
Ø Gas inlet	BSP	1"	1"
Ø Steam inlet	BSP	1"	1"
Ø Condensed (Steam model)	BSP	1/2"	1/2"
Ø Air inlet	mm	12	12
DIMENSIONS / PACKAGING DIMENSIONS			
Width / Width	mm	3.740 / 3.900	4.440 / 4.600
Depth / Depth	mm	2.210 / 2.280	2.210 / 2.280
Height / Height	mm	2.300 / 2.230	2.300 / 2.230
Weight / Weight	Kg	3.350 / 3.750	3.730 / 4.330
Volume	m3	19,01 / 19,83	22,57 / 23,39
OTHERS			
No. Fume outlet	Nº	2	2
Ø Fume outlet	mm	160	160
Air flow	m3/h	2 x 1.000	2 x 1.000
Air Consumption (6,5 Bar)	Nl/h	19.000	19.000
Sound Level	dB	70	70

Compact Stacker
(roll-off)




Stacker



Compact Stacker

Stacker

	L	P		L	P
SE2680	4.425	2.385	SE2680	5.105	2.476
SE3380	5.125	2.385	SE3380	5.805	2.476

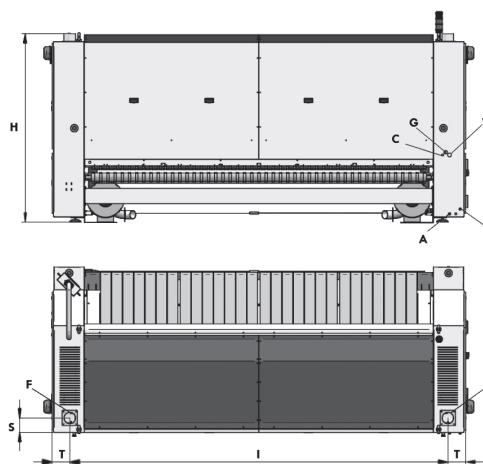

*50% residual moisture, 140gr / m2 of cotton, 100% roll utilization

- A. Compressed air inlet
- C. Condensation discharge (steam models)
- E. Electrical connection
- F. Fumes extraction
- G. Gas inlet
- V. Steam inlet

	H	I	T	S	A	C	E	F	G	V	W
SE2680 (mm)	1.867	1.196	1.208	478	Ø 12	1/2"	5G4	Ø 160	1"	1"	765
SE3380 (mm)	1.867	1.896	1.208	478	Ø 12	1/2"	5G4	Ø 160	1"	1"	765