

WALL IRONERS

PR-1025 / PR-1225 / PR-1425 / PR-2025



ELECTRONIC PROGRAMMER

Simple and user friendly: digital screen, precise control of temperature
Preset ironing speeds, not adjustable



EFFICIENCY

Acoustic comfort: 55 dB max
Minimum space requirement: space saving, suitable for small spaces
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...



ROBUSTNESS

Nomex coating: resistant to high temperatures
Panels in grey skinplate and stainless steel
Wooden feeding table
New kinematics: better reliability
Industrial roll axle and bearings: more durable



FEATURES

Large roll contact area with the linen
Automatic roll lifting control by photocell detection
Two available models:
Standard: roll with cotton polyester coating
Nomex: roll with Nomex coating



MAINTENANCE

Easy installation: requires only an electrical connection
Easy access on both sides for maintenance
Quick and easy dismantling of bearings



OTHERS

Front feeding and return
Roll ø 250 mm
Working widths: 1.000, 1.200 ,1.400 and 2.000 mm
Electric heating
CE certification


OPTIONS

- Pedal control instead of photocell
- Tension 440V III 60 Hz without N (marine)
- Tension 230V III + T 50-60 Hz
- Tension 230V I +N + T 50Hz (N/A for PR-2025)



TECHNICAL DATA	UNIT.	PR-1025	PR-1225	PR-1425	PR-2025
GENERAL DATA					
Theoretical production*	Kg/h	25	27	30	35
Ø Roll	mm	250	250	250	250
Working width	mm	1.000	1.200	1.400	2.000
Ironing speed	mt/min	4,2	4,2	4,2	4.2
Electronic programmer	-	Yes	Yes	Yes	Yes
Bed lifting	-	auto. by photocell	auto. by photocell	auto. by photocell	auto. by photocell
POWER					
Heating power	Kw	4,95	6	7	12
Roll motor power	Kw	0,18	0,18	0,18	0,18
Total electric power	Kw	5,13	6,18	7,18	12,18
CONNECTIONS ELECTRIC		ELECTRIC	ELECTRIC	ELECTRIC	ELECTRIC
Tension 230V - I + N + T	N° x mm²/A	3 x 6 / 25A	3 x 6 / 32A	3 x 10 / 40A	N/A
Tension 230V - III + T	N° x mm²/A	4 x 2,5 / 16A	4 x 4 / 20A	4 x 4 / 20A	4 x 6 / 32A
Tension 400V - III + N + T	N° x mm²/A	5 x 2,5 / 10A	5 x 2,5 / 10A	5 x 2,5 / 16A	5 x 4 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width/ Gross width	mm	1.462 / 1.490	1.662 / 1.690	1.862 / 1.890	2462 / 2490
Net depth/ Gross depth	mm	484 / 540	484 / 540	484 / 540	484 / 540
Net height/ Gross height	mm	985 / 1.130	985 / 1.130	985 / 1.130	985 / 1130
Net weight/ Gross weight	Kg	114 / 124	124 / 134	134 / 154	164 / 184
Volume	m3	0,69 / 0,91	0,79 / 1,03	0,89 / 1,15	1,17 / 1,51
OTHERS					
Sound Level	dB	55	55	55	55

*20%- 25% moisture

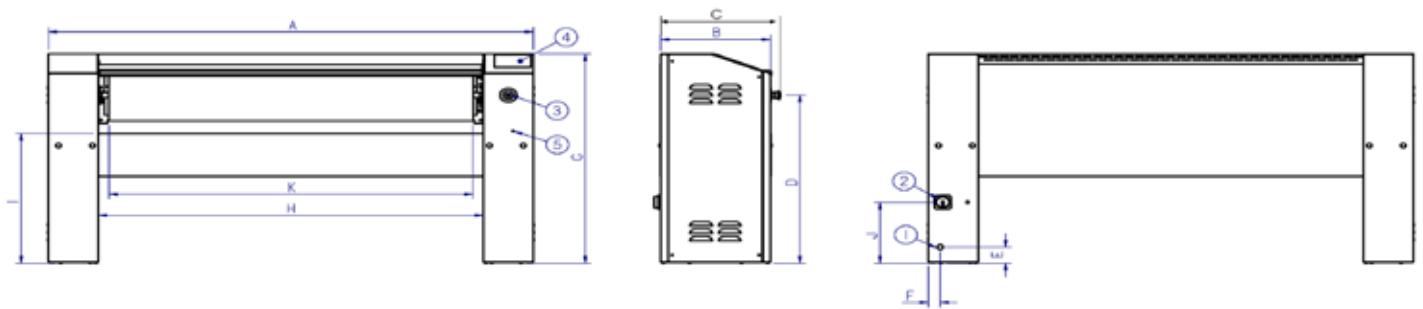

- 01. Electrical connection
- 02. Main switch
- 03. Emergency stop
- 04. Control panel
- 05. Access to inverter maintenance

	A	B	C	D	E	F	G	H	I	J	K
PR-1025	1.462	423	484	791	75	45	985	1.079	610	287	998
PR-1225	1.662	423	484	791	75	45	985	1.279	610	287	1.198
PR-1425	1.862	423	484	791	75	45	985	1.479	610	287	1.398
PR-2025	2.462	423	484	791	75	45	985	2.079	610	287	1.998