




TOUCH II

7" touch screen fully programmable
 37 available languages, 5 preset programs
 USB connection. Free Software online for programming, telemetry, data analysis
IoT - Domus Connect standard
 Reversing roll as standard



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure
 Automatic shutdown at 80°C (adjustable parameter)
 Fumes circulation circuit from the bottom reducing energy consumption
Model with radiant gas burners: +25% productive
EFFICIENT IRON: automatic regulation of ironing speed according to residual moisture as standard
OPTIMAL FEEDING: high production system, ironing speed up to 15 m/min as standard

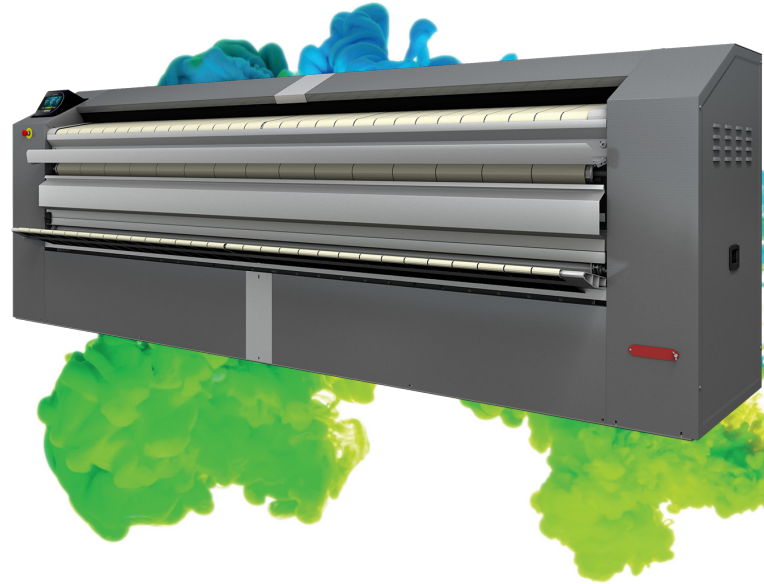

ROBUSTNESS

Roll driving by speed inverter
 Nomex quality ironing belts: high temperatures resistant
 Panels in skinplate and stainless steel.
 Nickel plate roll as option: anticorrosive, more durable



ERGONOMICS

Acoustic comfort : <65 dB
 Appropriate operating height: 1120 mm feeding belts
 Compact dimensions



MAINTENANCE

Easy access to all components on both sides of the machine
 Complete technical menu: statistics, autotest, data recovery for technician and maintenance
 Remote communication: faster intervention



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation
 Front feeding and return
 Built-in cool down system
 Polished steel roll ø 650 mm
 Roll length: 2000, 2600 and 3300 mm
 Electric, radiant gas and steam heating
 CE standard




OPTIONS

- Nickel plate roll
- Built-in lengthwise folder
- Rear exit (only with folder)
- Cross folder + stacker (only with folder)
- Antistatic belts (+ bar with folder)
- Marine tension 440V III 60Hz without N (electric models)
- Tension 230V III 50-60 Hz

TECHNICAL DATA	UNIT.	CM-2065 TOUCH II	CM-2665 TOUCH II	CM-3365 TOUCH II			
GENERAL DATA							
Theoretical production*	Kg/h	90	115	160			
Atmo. gas theoretical production*	Kg/h	-	-	-			
Radiant gas theoretical production*	Kg/h	104	132	184			
Evaporation power	l/h	40-46	51-60	72-82			
Ø Roll	mm	650	650	650			
Working length	mm	2.000	2.600	3.300			
Feeding bands height	mm	1.120	1.120	1.120			
Ironing speed	mt/min	0,5-15	0,5-15	0,5-15			
Electronic control		Yes	Yes	Yes			
No of programs	Nº	5	5	5			
Rear exit + length folder		OPT	OPT	OPT			
POWER							
Electric heating	kW	42	54	72			
Total electric power (elec. mod.)	kW	43,05	55,05	73,05			
Gas heating	kW	52	69	78			
Total electric power (gas mod.)	kW	1,05	1,05	1,05			
Steam heating	kW	60	76	97			
Total electric power (steam mod.)	kW	1,05	1,05	1,05			
Roll motor	kW	0,55	0,55	0,55			
Fan motor	kW	0,25x2	0,25x2	0,25x2			
Folder add. elec. power	kW	0,56	0,56	0,56			
Folder+rear exit add. elec. power	kW	0,74	0,74	0,74			
CONNECTIONS							
		ELECT / GAS		ELECT / GAS		ELECT / GAS	
Tension 230V - III + T	Nº x mm²/A	4x25 / 125A	4x2,5 / 6A	4x35 / 160A	4x2,5 / 6A	-	4x2,5 / 6A
Tension 400V - III + N + T	Nº x mm²/A	5x16 / 63A	5x2,5 / 6A	5x25 / 100A	5x2,5 / 6A	5x25 / 125A	5x2,5 / 6A
Ø Gas inlet		1"		1"		1"	
Ø Steam inlet		3/4"		3/4"		3/4"	
Ø condensed (steam model)		1/2"		1/2"		1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS							
Net / gross width	mm	2.845 / 3.145		3.445 / 3.745		4.145 / 4.445	
Net / gross depth	mm	1.070 / 1.153		1.070 / 1.153		1.070 / 1.153	
Net / gross height	mm	1.420 / 1.672		1.420 / 1.672		1.420 / 1.672	
Net / gross weight	Kg	1.189 / 1.231		1.517 / 1.567		1.765 / 1.815	
Volume	m³	4,32 / 6,06		5,23 / 7,22		6,30 / 8,57	
OTHERS							
No fume outlet	Nº	2		2		2	
Ø Extraction	mm	153		153		153	
Airflow	m3/h	1200		1200		1200	
Sound level	dB	65		65		65	

*45 % moisture

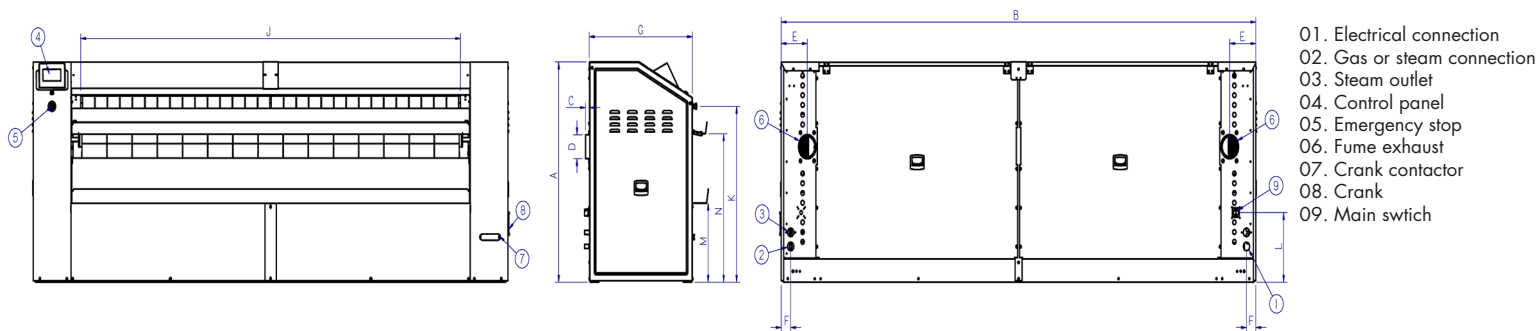

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
CM-2065	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
CM-2665	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
CM-3365	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952