



### TOUCH II

User friendly and totally programmable 7" Touch II USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT Videos on display (ads, instructions, etc.)  
37 languages  
8 dosing signals as standard



### G FACTOR

High G-Factor:  
G-FACTOR 450-500



### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



### VERSATILITY

Make to order: customisation  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



### CONNECTIVITY

IoT - Domus Connect standard.  
Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Biggest door diameters: Ø460  
Easy opening/closing system for door lock



### MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics for technicians and maintenance with external console (with console option)



### OTHERS

Grey skinplate outer casing  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
CB and WRAS approved product. Option ETL  
High spin washers with suspended drum.




### OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align the doorbase at 850mm)
- Plinth for mops with drawer inox/skinplate
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz  
No neutral
- Coin/token kit
- Auto unlock kit for the door.

TECHNICAL DATA		UNIT.	DHS - 18 TOUCH II		DHS - 22 TOUCH II	
<b>DRUM</b>						
Load capacity 1:9 / 1:10		Kg	20/18		25/22	
Volume		l	180		220	
Diameter		mm	700		700	
Depth		mm	470		560	
<b>GENERAL DETAILS</b>						
Washing speed / Spining speed		r.p.m.	47/1.133		47/1.071	
G Factor		-	500		450	
Maximum force transmitted		KN	3,41 ±1,4		4,12 ±1,4	
Frequency-dynamic force		Hz	16		16	
Noise level		dB	< 70		< 70	
Coin laundry version		-	Yes		Yes	
Double drain		-	Opt		Opt	
Weighing System / Tilting System		-	Opt / No		Opt / No	
SLUICE option		-	No		No	
<b>DOOR</b>						
Height center door / Height door		mm	765 / 450		765 / 450	
Diameter		mm	460		460	
<b>POWER</b>						
Motor		kW	2,2		2,2	
Electric heating power		kW	12		12	
Total electric power (electric model)		kW	12,75		12,75	
Total electric power (hw, steam model)		kW	2,2		2,2	
<b>CONNECTIONS</b>			<b>ELECTRIC</b>	<b>STEAM - HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM - HOT WATER</b>
Tension 230V - I + N + T		Nº x mm2 / A	2x16+T - 63A	2x4+T - 32A	2x16+T - 63A	2x4+T - 32A
Tension 230V - III + T		Nº x mm2 / A	3X6+T - 40A	-	3X6+T - 40A	-
Tension 400V - III + N + T		Nº x mm2 / A	4x4+T - 32A	-	4x4+T - 32A	-
Steam inlet (Steam model) inch		inch	1/2"		1/2"	
Maximum steam consumption (Steam model)		Kg/h	12		12	
Water inlet inch		inch	3/4"		3/4"	
Water main pressure		Kgs/cm2	2-4		2-4	
Maximum water consumption*		Lit/h	118,3*		118,3*	
Drain inch		inch	3"		3"	
Drainage capacity		Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>						
Net Width / Gross Width		mm	884 / 945		884 / 945	
Net Depth / Gross Depth		mm	913 / 1.030		1003/1.140	
Net Height / Gross Height		mm	1.415 / 1.700		1.415 / 1.700	
Net weight / Gross weight		kg	360 / 393		380/413	
Volume		m3	1,63		1,83	

\* Program n°20, 75% load

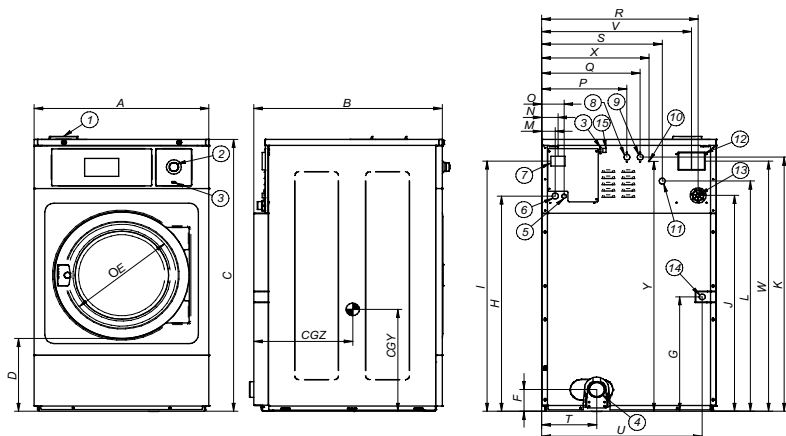

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
DHS-18	mm	884	913	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	702
DHS-22	mm	884	1.003	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	747