



### TOUCH II

User friendly and totally programmable 7" Touch II  
USB Connection. Online platform free of charge for  
programming, telemetry, data analysis...thanks to the IoT  
Videos on display (ads, instructions, etc.)  
37 languages  
8 dosing signals as standard



### G FACTOR

High G-Factor:  
G-FACTOR 450



### EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



### VERSATILITY

Make to order: customisation  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



### CONNECTIVITY

IoT - Domus Connect standard.  
Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Biggest door diameters: Ø460  
Easy opening/closing system for door lock



### MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics for technicians and  
maintenance with external console (with console option)



### OTHERS

Grey skinplate outer casing  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
CB and WRAS approved product. Option ETL  
High spin washers with suspended drum.




### OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicon gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align loading height (door base at 850mm)
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime volt. electric models: 440V III 50/60Hz (no N)
- Coin/token kit
- Auto unlock kit for the door.

TECHNICAL DATA	UNIT.	DHS - 28 TOUCH II	
<b>DRUM</b>			
Load capacity 1:9 / 1:10	Kg	31/28	
Volume	l	280	
Diameter	mm	770	
Depth	mm	585	
<b>GENERAL DETAILS</b>			
Washing speed / Spining speed	r.p.m.	45/1.024	
G Factor	-	450	
Maximum force transmitted	KN	5,59 ±1,75	
Frequency-dynamic force	Hz	15	
Noise level	dB	< 70	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	Opt / No	
SLUICE option	-	No	
<b>DOOR</b>			
Height center door / Height door	mm	865 / 560	
Diameter	mm	460	
<b>POWER</b>			
Motor	kW	4	
Electric heating power	kW	18	
Total electric power (electric model)	kW	19,2	
Total electric power (hw, steam model)	kW	4	
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM - HOT WATER</b>
Tension 230V - I + N + T	Nº x mm2 / A		2x4+T - 32A
Tension 230V - III + T	Nº x mm2 / A	3x16+T - 63A	-
Tension 400V - III + N + T	Nº x mm2 / A	4x4+T - 32A	-
Steam inlet (Steam model) inch	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet inch	inch	3/4"	
Water main pressure	Kgs/cm2	2-4	
Maximum water consumption*	Lit/h	175,5*	
Drain inch	inch	3"	
Drainage capacity	Lit/min	200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>			
Net Width / Gross Width	mm	979 / 1.040	
Net Depth / Gross Depth	mm	1070/1210	
Net Height / Gross Height	mm	1.553 / 1.850	
Net weight / Gross weight	kg	540 / 595	
Volume	m3	2,33	

\* Program nº20, 75% load

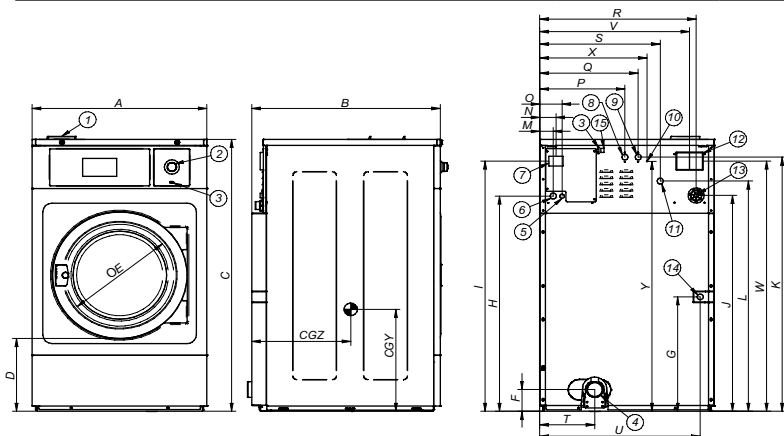

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN
5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
6. ELECTRICAL CONNECTION
7. MAIN SWITCH
8. AUXILIAR WATER INLET
9. HOT WATER INLET
10. EQUIPOTENTIAL CONNECTION
11. COLD WATER INLET
12. BLUR OUTPUT / WATER OVERLOAD
13. LIQUID SOAP CONNECTION
14. STEAM CONNECTION
15. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
DHS-28	mm	979	1.099	1.553	560	460	133	490	1.282	1.450	1.259	1.465	1.354	61	74	101	481	561	861	673	367	909	831	1.424	624	1.510	773	735