

**M PROGRAMMER**  
New M programmer: push buttons to control temperature and time

**OUTSTANDING FEATURES**  
Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard

**EFFICIENCY**  
DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter

**VERSATILITY**  
Make to order - customisation  
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

**ERGONOMICS**  
Drawer as fluff filter, stainless steel mesh  
Biggest door diameters

**MAINTENANCE**  
Hinged control panel: easy and ergonomic access  
Technical menu: statistics for technicians and maintenance with external console (with console option)

**OTHERS**  
Grey skinplate outer casing, stainless steel look  
SFEX - Integrated Fire Extinguishing System  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Heating options: electric, gas  
CE approved




**OPTIONS**

- Screen in M programmer (2 units)



- Double doorglass
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm)
- Stainless steel front and side panels
- Front panel in stainless steel
- Maritime wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA	UNIT.	DTM2-11	DTM2-14	DTM2-18			
<b>CAPACITY</b>							
Capacity 1/18	Kg	24	30	36			
Capacity 1/20	Kg	22	28	34			
Hourly Output (electr. // gas)	Kg/h	31,6 // 30,6	34,4 // 33,8	36,2 // 36			
Evaporation capacity (electr. // gas)	l/h	15,8 // 15,3	17,2 // 16,9	18,1 // 18			
<b>DRUM</b>							
Ø Drum	mm	750	750	750			
Ø Door	mm	574	574	574			
Door center height	mm	547 / 1.522	547 / 1.522	547 / 1.522			
Load hole bottom height	mm	260 / 1.235	260 / 1.235	260 / 1.235			
Drum length	mm	475	610	746			
Drum volume	l	210	269	330			
<b>POWER</b>							
Drum motor power	kW	0,37 x 2	0,37 x 2	0,37 x 2			
Fan motor power	kW	0,25 x 2	0,25 x 2	0,25 x 2			
Electric heating power	kW	12 x 2	12 x 2	12 x 2			
Total electric power (elec.model)	kW	25,34	25,34	25,34			
Gas heating power	kW	12 x 2	12 x 2	12 x 2			
Instant propane gas consumption (G31)	kg/h	1,03 x 2	1,03 x 2	1,03 x 2			
Instant natural gas consumption (G20)	m3/h	1,27 x 2	1,27 x 2	1,27 x 2			
Total electric power (gas model)	kW	1,34	1,34	1,34			
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.106 / 1.189		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	Kg	260 / 268		275 / 293		290 / 317	
<b>OTHERS</b>							
Max airflow	m3/h	500 x 2		500 x 2		500 x 2	
Ø Fume exhaust	mm	200		200		200	
Sound level	dB	64		64		64	

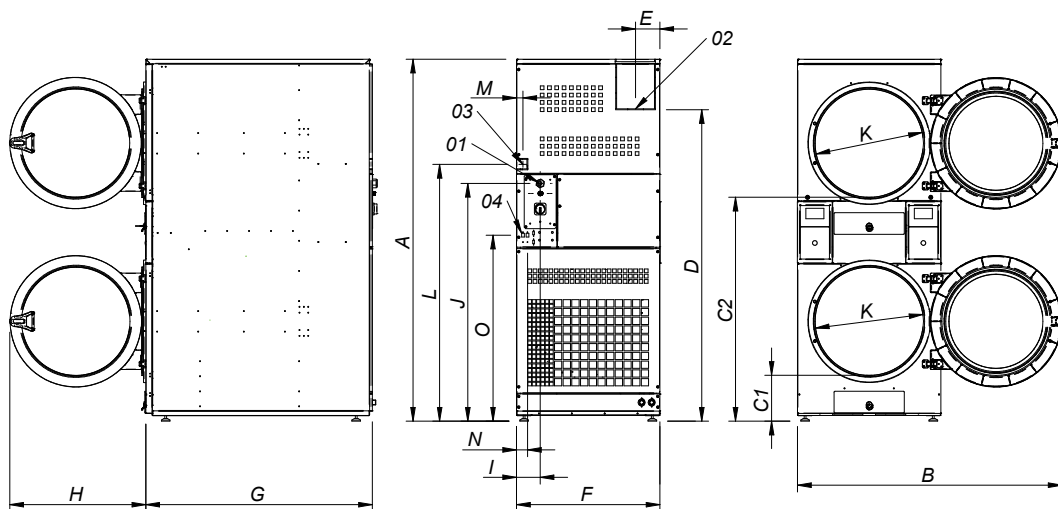

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
DTM2-11	1980*	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	60	1018
DTM2-14	1980*	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	60	1018
DTM2-18	1980*	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	60	1018

\* Measurement with legs mounted (30mm)