



## TOUCH II

User friendly and totally programmable 7" Touch II  
USB Connection. Online platform free of charge for  
programming, telemetry, data analysis...thanks to  
the IoT  
Videos on display (ads, instructions, etc.)  
37 languages



## OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



## EFFICIENCY

EFFICIENT DRY - Intelligent humidity control. With  
new drum inlet temperature control.  
AIR RE-CYCLE - Efficient air recirculation system  
THERMAL INSULATION - Complete air-flow circuit  
Double door glass  
FULL FLOW - New 'optimized' system of mixed  
airflow  
Big fluff filter



## VERSATILITY

Make to order - customisation  
WET CLEANING



## CONNECTIVITY

Standard IoT Domus Connect



## ERGONOMICS

Drawer as fluff filter, stainless steel mesh  
Biggest door diameters  
Opening sense of door adjustable on site



## MAINTENANCE

Hinged control panel: easy and ergonomic access  
Technical menu: statistics for technicians and main-  
tenance with external console (with console option)



## OTHERS


Grey skinplate outer casing, stainless steel look  
SFEX - Integrated Fire Extinguishing System  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Heating options: electric, gas and steam  
CE approved



## OPTIONS

- Opposite door opening
- Tropicalized model
- Dosing/spraying system
- Back panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Stainless steel front and side panels
- Front panel in stainless steel
- Steam battery in stainless steel
- Low pressure steam battery
- Reduced power (12kw instead of 18kw) for DTT-14
- Ship voltage for electric models:  
440V III 50/60 Hz No neutral
- Other voltages available
- Maritime wooden packing

| TECHNICAL DATA                         | UNIT.        | DTT-11 ECO-ENERGY |                  | DTT-14 ECO-ENERGY |                  |
|--|--------------|-------------------|------------------|-------------------|------------------|
| <b>CAPACITY</b>                        |              |                   |                  |                   |                  |
| Capacity 1/18 // Capacity 1/20         | Kg           | 11,7 // 10,5      |                  | 15 // 13,5        |                  |
| Hourly Output (electr. // gas)         | Kg/h         | 21,7 // 31,3      |                  | 29 // 32,5        |                  |
| Evaporation capacity (electr. // gas)  | l/h          | 11 // 15          |                  | 14,5 // 15,6      |                  |
| <b>DRUM</b>                            |              |                   |                  |                   |                  |
| Ø Drum                                 | mm           | 750               |                  | 750               |                  |
| Ø Door                                 | mm           | 574               |                  | 574               |                  |
| Door center height                     | mm           | 976               |                  | 976               |                  |
| Load hole bottom height                | mm           | 689               |                  | 689               |                  |
| Drum length                            | mm           | 475               |                  | 610               |                  |
| Drum volume                            | l            | 210               |                  | 269               |                  |
| <b>POWER</b>                           |              |                   |                  |                   |                  |
| Drum motor power                       | kW           | 0,37              |                  | 0,37              |                  |
| Fan motor power                        | kW           | 0,55              |                  | 0,55              |                  |
| Electric heating power                 | kW           | 12                |                  | 18                |                  |
| Total electric power (elec.model)      | kW           | 12,97             |                  | 18,97             |                  |
| Gas heating power                      | kW           | 20,51             |                  | 20,51             |                  |
| Instant propane gas consumption (G31)  | kg/h         | 1,76              |                  | 1,76              |                  |
| Instant natural gas consumption (G20)  | m3/h         | 2,17              |                  | 2,17              |                  |
| Total electric power (gas model)       | kW           | 0,97              |                  | 0,97              |                  |
| Steam heating power                    | kW           | 30                |                  | 30                |                  |
| Total electric power (steam model)     | kW           | 0,97              |                  | 0,97              |                  |
| <b>CONNECTIONS</b>                     |              |                   |                  |                   |                  |
|  |              | <b>ELECTRICAL</b> | <b>GAS/STEAM</b> | <b>ELECTRICAL</b> | <b>GAS/STEAM</b> |
| Tension 230V - I + N + T               | Nº x mm2 / A | 3 x 25 / 63A      | 3 x 1,5 / 20A    | -                 | 3 x 1,5 / 20A    |
| Tension 230V - III + T                 | Nº x mm2 / A | 4 x 10 / 40A      | 3 x 1,5 / 20A    | 4 x 16 / 63A      | 3 x 1,5 / 20A    |
| Tension 400V - III + N + T             | Nº x mm2 / A | 5 x 4 / 25A       | 3 x 1,5 / 20A    | 5 x 10 / 32A      | 3 x 1,5 / 20A    |
| Ø Gas inlet                            | BSP          | 1/2"              |                  | 1/2"              |                  |
| <b>DIMENSIONS / PACKING DIMENSIONS</b> |              |                   |                  |                   |                  |
| Net width / Gross width                | mm           | 785 / 865         |                  | 785 / 865         |                  |
| Net Depth / Gross Depth                | mm           | 855 / 940         |                  | 989 / 1074        |                  |
| Net Height / Gross Height              | mm           | 1694 / 1840       |                  | 1694 / 1840       |                  |
| Net weight / Gross weight              | Kg           | 172 / 180         |                  | 180 / 190         |                  |
| <b>OTHERS</b>                          |              |                   |                  |                   |                  |
| Max airflow                            | m3/h         | 850               |                  | 1.200             |                  |
| Ø Fume exhaust                         | mm           | 200               |                  | 200               |                  |
| Sound level                            | dB           | 64                |                  | 64                |                  |

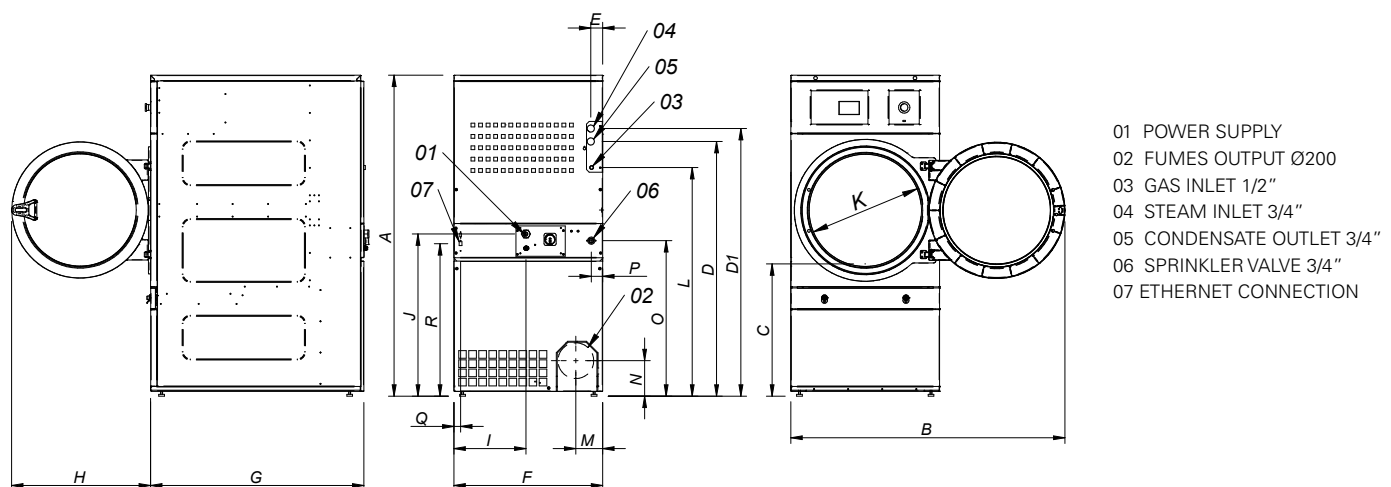

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 05 CONDENSATE OUTLET 3/4"
- 06 SPRINKLER VALVE 3/4"
- 07 ETHERNET CONNECTION

|        | A     | B    | C   | D    | D1   | E  | E1 | F   | G   | H   | I   | J   | K   | L    | M   | N   | O   | P  | Q  | R   |
|--------|-------|------|-----|------|------|----|----|-----|-----|-----|-----|-----|-----|------|-----|-----|-----|----|----|-----|
| DTT-11 | 1694* | 1447 | 689 | 1354 | 1422 | 68 | 68 | 785 | 855 | 735 | 380 | 870 | 575 | 1226 | 133 | 180 | 830 | 65 | 35 | 805 |
| DTT-14 | 1694* | 1447 | 689 | 1354 | 1422 | 68 | 68 | 785 | 989 | 735 | 380 | 870 | 575 | 1226 | 133 | 180 | 830 | 65 | 35 | 805 |

\* Measurement with legs mounted (30mm)