


FEATURES

DES-F

- Cold spotting table with built-in suction unit and stainless steel vacuum swinging arm.
- Featuring two cold spotting spray guns with independent circuits, two receptacles for liquids, hose support and swinging arm with suction and spotting shape out of stainless steel AISI 304.
- Board out of stainless steel AISI 304.
- Board dimensions: 800 x 260 x 175 mm.
- Electric connection: 230V I+N / 50-60 Hz.
- It needs compressed air : consumption 200 NI/min, air working pressure 4 - 8 bar.
- Model with built-in air compressor available : electric connection 230/400V III 50Hz.

MINI-DES

- Compact cold spotting table with built-in suction unit
- Equipped with two cold spotting guns with independent circuit and two tanks for solvents.
- One working pedal.
- Stainless steel AISI 304 board (400 x 200 x 35 mm).
- Electric connection: 230V I+N / 50-60 Hz.
- It needs compressed air: consumption 30 NI/min, air working pressure 6 - 8 bar

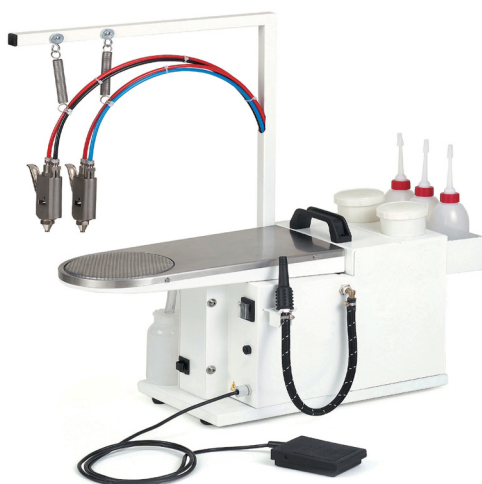

OPTIONS

- Air compressor for DES-F model
- Air steam gun for DES-F model
- Trolley for MINI-DES model

TECHNICAL DATA	UNIT.	DES-F	MINI-DES
GENERAL DETAILS			
Board dimensions	mm	800 x 260 x 175	400 x 200 x 35
Boiler	-	No	No
Boiler capacity	l	-	-
Compressor	-	Opt	-
Group of Iron	-	-	-
Steam gun	-	Opt	-
Polished upper buck	-	-	-
POWER			
Vacuum Motor	HP	0,6	0,13
Pump Motor	HP	-	-
Compressor motor (Mod. with option)	HP	2	-
Boiler Heater (Mod. with option)	kW	-	-
Fan motor	kW	-	-
CONNECTIONS			
Ø Water inlet	BSP	-	-
Ø Boiler exhaust (mod. with boiler)	BSP	-	-
Ø Steam inlet	BSP	3/8"	-
Ø Condensate outlet	BSP	3/8"	-
Steam pressure	BAR	4,5	-
Steam Consumption	Kg/h	2-3	-
Ø Air inlet	BSP	1/4"	1/4"
Ø Air outlet	mm	90	-
Air pressure	BAR	4-8	6-8
Air Consumption	NI/min	200	30
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	1.200 / 1.300	640 / 600
Net depth / Gross depth	mm	650 / 540	320 / 450
Net height / Gross height	mm	1.800 / 1.160	325-670 / 540
Net weight / Gross weight	kg	44 / 78 - 58 / 145 (+comp.)	13 / 16
Volume	m ³	1,40 / 1,51	0,14 / 0,15
OTHERS			
Voltage	Hz	230V 50/60	230V 50/60
Sound level	dB	65	65