

ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow.
Big fluff filter.

VERSATILITY

Make to order - customisation.
OPL > Coin laundry- Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS

Drawer as fluff filter, stainless steel mesh.
Biggest door diameters.
Opening sense of door adjustable on site.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

OTHERS


Grey skinplate outer casing, stainless steel look.
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric, gas or steam.
CE approved



OPTIONS

- Double doorglass DTM-11-28
- Opposite door opening DTM-11-35
- M programmer display for DTM-11-35
- Back panel with air filter
- Fluff filter with grid 0,6 mm (standard is 0,3 mm)
- Fluff filter with grid 1,2 mm (standard is 0,3 mm)
- Stainless steel front and side panels
- Front panel in stainless steel
- Steam battery in stainless steel
- Low pressure steam battery
- Maritime wooden packing
- 400V 3N 60Hz DTM-11-35
- 230V 3~ 50Hz DTM-22-35 E
- 230V 3~ 60Hz DTM-22-35 E
- 230V 3~ 60Hz DTM-11-35 G/V
- 440/480V 3~ 60Hz DTM-22-35
- Several payment systems for self-service

CAPACITY	UNIT.	DTM-22	
Capacity 1/18	Kg	24,3	
Capacity 1/20	Kg	21,9	
Hourly output (gas model)	Kg/h	40	
Evaporation capacity (gas model)	L/h	20	
Evaporation capacity (elec. model)	L/h	17	
Hourly output (elec. model)	Kg/h	34	
DRUM			
Ø Drum	mm	835	
Ø Door	mm	574	
Door center height	mm	1.030	
Load hole bottom height	mm	743	
Drum length	mm	800	
Drum volume	L	438	
POWER			
Drum motor power	kW	0,37	
Fan motor power	kW	0,55	
Electric heating power	kW	24	
Total electric power (elec. model)	kW	24,97	
Gas heating power	kW	31	
Instant propane gas consumption (G31)	Kg/h	2,66	
Instant natural gas consumption (G20)	m ³ /h	3,28	
Total electric power (gas model)	kW	0,97	
Steam heating power	kW	49,2	
Total electric power (steam model)	kW	0,97	
CONNECTIONS		E	G / S
Tension 230V - I + N + T	Nº x mm ² / A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm ² / A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm ² / A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"	
DIMENSIONS			
Net width	mm	890	
Net depth	mm	1.255	
Net height	mm	1.812	
Net weight	Kg	210	
PACKING DIMENSIONS			
Gross width	mm	970	
Gross depth	mm	1.345	
Gross height	mm	1.940	
Height without heating battery	mm	-	
Gross weight	Kg	230	
OTHERS			
Max airflow	m ³ /h	1.200	
Ø Fume exhaust	mm	200	
Sound level	dB	65	

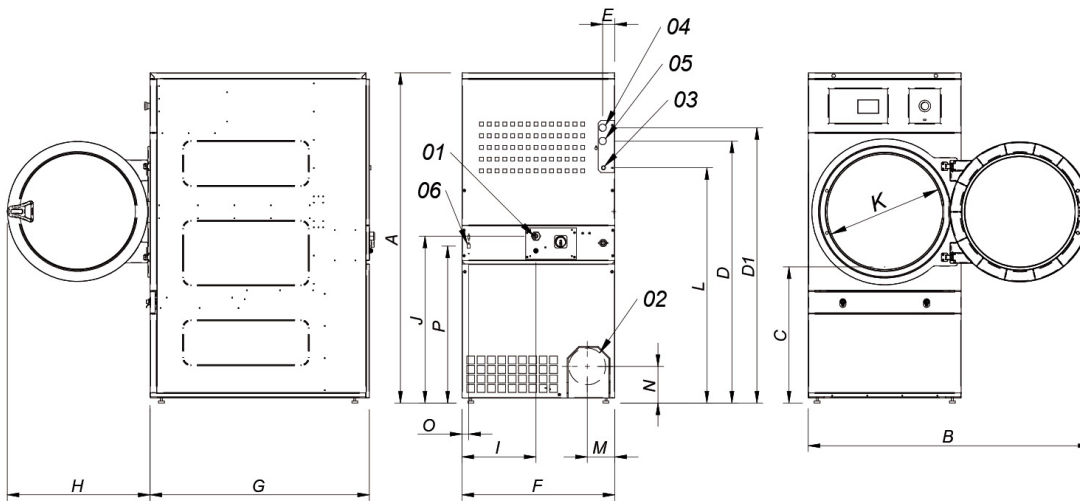

- 01. Power supply
- 02. Fumes output Ø 200
- 03. Gas inlet 1/2"
- 04. Steam inlet 3/4" (DTM-18)
- 04. Steam inlet 1" (DTM-22)
- 05. Condensate outlet 3/4" (DTM-18)
- 05. Condensate outlet 1" (DTM-22)
- 06. Ethernet connection (only available Control Touch II models)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
DTM-18	1.694*	1.447	689	1.354	1.422	68	68	785	1.125	735	380	870	575	1.226	133	180	35	805
DTM-22	1.812*	1.552	743	1.430	1.532	112	55	890	1.255	735	107	920	575	1.344	238	180	37	860

* Measurement with legs mounted (30mm)