



FRONT LOAD WASHER EXTRACTORS


2025

A wide and versatile range

DOMUS presents a cutting-edge range of high and low spin washers, blending advanced design and cutting edge technology with a wide variety of accessories and options.

All models are equipped with the innovative TOUCH II microprocessor, delivering a high G factor, connectivity features, and versatile functionality. When connected to ECOTANK water recovery tanks, DOMUS washers optimise water usage, significantly reducing consumption and operational costs. Additionally, the available weighing options enhance resource efficiency by adjusting water and detergent usage based on load size.

With the latest launches, DOMUS now offers the most extensive range on the market, suiting every need with capacities of 11, 14, 18, 22, 28, 35, 45, 60, 80, 100, and 120 kg.

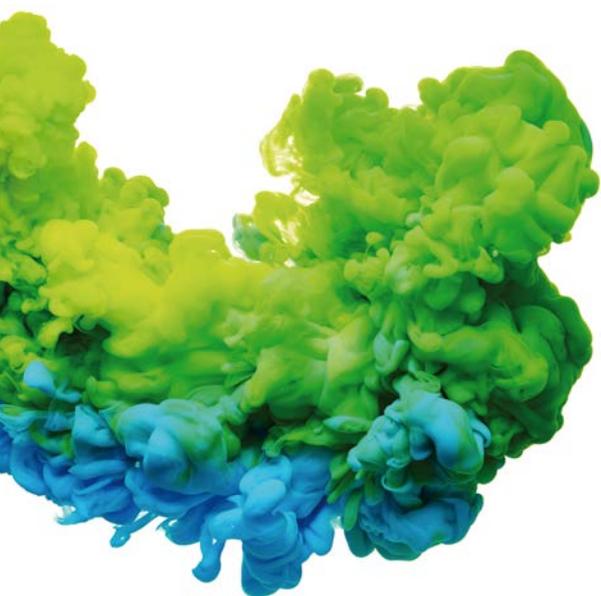

ECOVOLUTION

by DOMUS



HIGH SPIN WASHERS | G Factor 500-450

| CONTROL TYPE | HEATING | CAPACITY | | | | | |
|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|------------------|-------------------|-------------------|
| | | 10-11 kg | 13-14 kg | 18-20 kg | 22-25 kg | 28-31 kg | |
| TOUCH II Programmable Control | Electric, hot water and steam | DHS-11 TOUCH II FACTOR 500 | DHS-14 TOUCH II FACTOR 500 | DHS-18 TOUCH II FACTOR 500 | DHS-22 TOUCH II | DHS-28 TOUCH II | |
| CONTROL TYPE | HEATING | LARGE CAPACITY | | | | | |
| | | 35-39 kg | 42-47 kg | 59-65 kg | 77-85 kg | 95-105 kg | 115-130 kg |
| TOUCH II Programmable Control | Electric, hot water and steam | DHS-35C TOUCH II | DHS-45C TOUCH II | DHS-60C TOUCH II | DHS-80C TOUCH II | DHS-100C TOUCH II | DHS-120C TOUCH II |



LOW SPIN | G Factor 200

| CONTROL TYPE | HEATING | CAPACITY | | | | |
|-------------------------------|-------------------------------|------------------|------------------|------------------|------------------|-----------------|
| | | 10-11 kg | 13-14 kg | 18-20 kg | 22-25 kg | 28-31 kg |
| TOUCH II Programmable Control | Electric, hot water and steam | DLS-11 TOUCH II | DLS-14 TOUCH II | DLS-18 TOUCH II | DLS-22 TOUCH II | DLS-28 TOUCH II |
| CONTROL TYPE | HEATING | LARGE CAPACITY | | | | |
| | | 35-39 kg | 42-47 kg | 59-65 kg | 77-85 kg | |
| TOUCH II Programmable Control | Electric, hot water and steam | DLS-35C TOUCH II | DLS-45C TOUCH II | DLS-60C TOUCH II | DLS-80C TOUCH II | |

NOTE: All models can be easily converted to self-service mode except DHS-60, 100C and 120C, with a coin kit, token kit, with central pay or the payment APP thanks to IoT.

HIGH SPIN WASHERS

FACTOR
500 



DHS

G Factor 500/450/350

- ✔ Soft mounted washers, free standing
- ✔ 7" TOUCH II microprocessor
- ✔ DOMUSCONNECT - standard IoT connectivity
- ✔ Panels in skinplate
- ✔ Drum and vat in stainless steel AISI 304
- ✔ R.P.M. between 678 - 1.300
- ✔ Three water inlets
- ✔ 8 signals for automatic dosing
- ✔ Easy to install, no needs of fixation to the floor, no extra costs
- ✔ Savings due to high extraction of water (44% residual humidity)

LOW SPIN WASHERS



DLS

G Factor 200/150

- ✓ Hard mounted washers
- ✓ 7" TOUCH II microprocessor
- ✓ **DOMUSCONNECT** - standard IoT connectivity
- ✓ Anchoring to floor with anchoring base
- ✓ Panels in skinplate
- ✓ Drum and vat in stainless steel AISI 304
- ✓ R.P.M. between 505 - 759
- ✓ Three water intakes
- ✓ 8 signals for liquid dosing
- ✓ Savings due to high extraction of water (65% residual humidity)

ECOENERGY



TOUCH II

- ✓ **Easy-to-use microprocessor, fully programmable with a 7" touchscreen.**
- ✓ **DOMUSCONNECT** - Standard and free IoT connectivity.
- ✓ **Videos on display: ads, instructions** (useful for self-service laundry).
- ✓ **Multilingual interface:** choose your preferred language from a wide and constantly expanding selection.
- ✓ **Control of detergent dosing:** 8 standard signals and 6 extra as an option.
- ✓ **USB port:** configure, update, and analyse machines without internet connection.



G FACTOR

- ✓ **High G Factor for all range of washers comparing with competitors**
G Factor 500-450 for high spin washers.
G Factor 200 for low spin washers.
- ✓ **High G Factor reduces residual moisture and drying time**



VERSATILITY

- ✓ **Make to order: customisation.**
Possibility to customise the machines from factory with the available options.
- ✓ **OPL < > Self-service**
Standard models easily transformable with coin/token kits.
- ✓ **Electric < > Hot water**
Standard electric models easily transformable to hot water models.
- ✓ **Drain valve < > Pump**
Standard models easily transformable.
Easy access and service.
- ✓ **Wet Cleaning**
All washers have all features to use Wet Cleaning programs.
- ✓ **Water RE-CYCLE** (recirculation of bath water).



CONNECTIVITY

- ✓ **DOMUSCONNECT** - Standard and free IoT connectivity.
Machine monitoring, machine error warning, management for telemetry and statistics. Remote desk and data recovery for technicians and maintenance, software update, etc.
- ✓ **NEW telemetry:** detailed data with dynamic and customisable graphs.
- ✓ **Management for laundries: OPL and self-service**
Our DOMUS IoT solution allows you to manage your laundry business (i.e. create discount programs for customers, get statistics, telemetry and laundry monitoring).
- ✓ **LEMS by Onnera pulse concentrator**
- ✓ **Remote payment:** App for payments, cashless payment by scanning a QR code, promotions and machine booking.

Nuovo



EFFICIENCY

✓ WATER SAVING

Possibility of configuring three levels of savings.

✓ **Optimal Loading:** manual indication of weight.

✓ **Intelligent Consumption:** automatic adjustment of water and soap consumptions (standard).

✓ **Prepared to be connected to water recovery tanks: ECOTANK XL and ECOTANK.**

✓ Low water consumption

Standard washing program consumes less than 8,2 liters of water per kg and cycle.

✓ **High G Factor 500-450 for High spin machines**

Reduced residual moisture > reduced drying time.

✓ OPTIONS

Automatic weighing system on feet.

LEMS by Onnera pulse concentrator.

Nuevo



ERGONOMICS

✓ Biggest door diameters in the market

Helpful, mainly for big capacity washers, for loading and unloading operations.

✓ **Easy opening/closing system for door lock**

✓ **Plinths for 11, 14, 18, 22, 28, 35 and 45 kg models**

To align loading height (door base at 850 mm).



MAINTENANCE

✓ **Hinged panel** Easy and ergonomic access to control panel parts.

✓ Equivalent parts

Most key parts are the same for all models parts are same for all models (contactors, electronic devices, gear...).

✓ **Easy access to parts for reparability**

✓ **Technical menu:** telemetry, error diagnosis, machine monitoring, software update...



TOUCH II

The TOUCH II includes many features based on achieving more efficiency, versatility and connectivity.

User friendly and totally programmable microprocessor

7" touch screen.
 Configuration of washing and spinning speed.
 Complete regulation of water levels.
 Regulable washing temperature from 20 °C to 90 °C.
 Standard Wet Cleaning system.

Videos on display

Ads, instructions (useful for self-service laundries).



Intuitive dosing

Easily and intuitively control the detergent dosing of your washing machines. Supports 8 standard signals, with 6 additional signals as an option.



Multilingual interface

Choose your preferred language to display on the TOUCH II screen from a wide and constantly expanding selection.



DOMUSCONNECT:

Maximum efficiency and real-time control

Discover the power of IoT connectivity, integrated for free in all machines with TOUCH II via Ethernet, for advanced and efficient management.

- ✓ Monitor telemetry and statistics in real time.
- ✓ Optimise the performance of your equipment.
- ✓ Ensuring MAXIMUM HYGIENE.
- ✓ Receive remote technical support.
- ✓ Update the software and much more.



USB port

If you don't have an internet connection in your laundry, the USB port allows you to configure, update, and analyse the machines via this connection by downloading and uploading data.

G FACTOR

DOMUS washer extractors, whether high or normal spin, are the ones with the highest G Factor in the market, which ensures minimum residual moisture, and this translates into less energy costs during the drying cycle.

High G Factor reduces residual moisture and drying time

With a higher G Factor, there is more water extraction and less residual moisture in the garments. To obtain a higher G Factor we modify the machine construction, from a hard mount to a soft mount.

Spinning

LOW SPIN

HIG SPIN

RIGID CONSTRUCTION

FLOATING CONSTRUCTION

G Factor



Residual moisture




This translates directly in more efficiency in the drying cycle, with a high spin washer, as the drying cycle is much shorter.



EFFICIENCY

In a laundry, the machines are the visible part of an iceberg.

At DOMUS we pay attention to the iceberg part that cannot be seen, to optimize the expenses during the whole Life Cycle Cost.

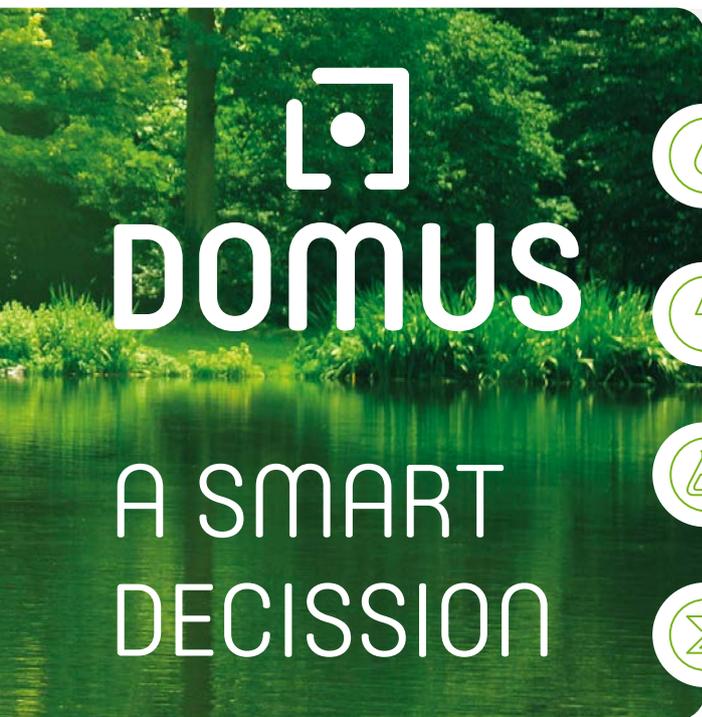

Start saving with Domus in:



Water

We design our systems to ensure efficient water usage, preventing waste.



Energy

We optimise our machines to guarantee greater energy savings and maximise laundry efficiency.



Chemicals


We design our washers and barriers with features that ensure the precise use of chemicals.



Time

We adjust process times, key in a laundry, to increase efficiency and business profitability.

Example of a standard laundry with 50% flat linen and 50% towelling, during the first 10 years of life.

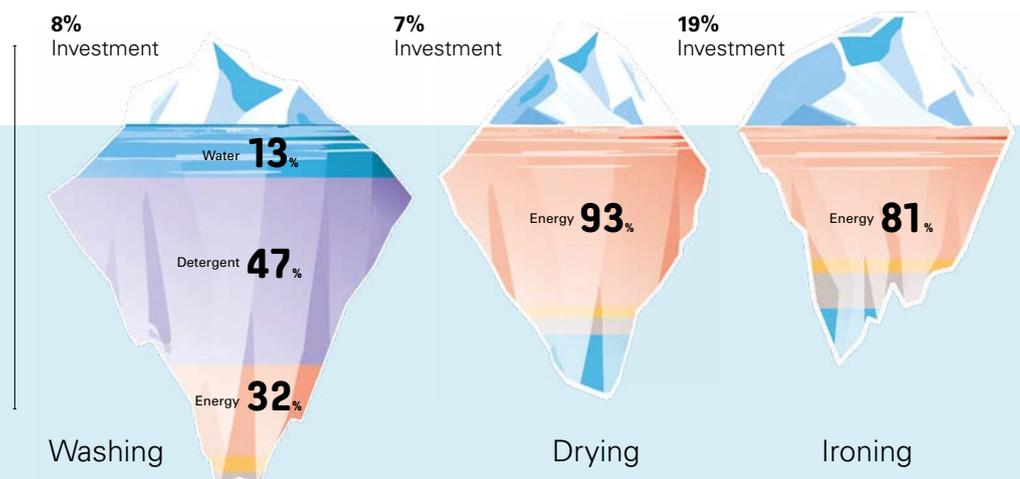



EFFICIENCY



Pulse concentrator LEMS by Onnera

New system to control actual consumption and turn your laundry into an ECOSMART LAUNDRY. Discover the savings you can achieve here:



Low water consumption

A standard wash programme consumes less than 8.2 litres of water per kg and cycle.



Weighing system

Option available in models from DHS-11 to DHS-120. It brings great water, chemicals and energy savings, especially with partial loads, as it adjusts water and chemicals to the real load.

WATER SAVING

Possibility of configuring three savings levels.

Intelligent consumption

Automatic adjustment of water and soap (standard).



ECOTANK XL

Large capacity tanks

Designed to store up to **1000 litres**, allowing to save large volume of water.



Combinables

The ECOTANK XL can be integrated with different Domus machines with TOUCH II, offering multiple configuration options:

- ✓ It is possible to combine 1, 2 or 3 ECOTANK XL tanks for a larger capacity system.
- ✓ Each ECOTANK XL tank can connect up to:
 - 8 machines of 35 / 45 kg.
 - 4 machines of 60 / 80 kg.
 - 3 machines of 100 / 120 kg.

Ideal for industrial laundries

with large capacity machines

ECOTANK

80 and 150 litre tanks

to save a lot of water in small spaces.



Versatile

Each washer or barrier can have 1, 2 or 3 tanks in a column.

Little space required

Thanks to its compact design organized in a column, it is ideal for companies with small spaces and for reusing water from small machines.



VERSATILITY

To adapt to the needs of the different businesses.

Make to order: **customization**

New possibility to customise the machine from factory with the available options.

Electric < > **Hot water**

Standard electric models easily transformable to hot water models.

Drain valve < > **Pump**

Standard models easily transformable
Easy access and service.

WATER RE-CYCLE

Optional kit to increase the care of the linen: recirculation of the bath water, which increases the water flow with chemicals, shortens the cycle and improves the effectiveness without mechanical action.



Wet Cleaning[®]

Thanks to DOMUS constant development, our models are equipped with the features to use Wet Cleaning programs:

- ✓ Fully programmable TOUCH II.
- ✓ Total control of temperature and water levels.
- ✓ Programmable washing speed: very low (13 R.P.M.).
- ✓ Rhythm on/off 3 seg/40 seg.
- ✓ Total control of dosing signal.



Payment options

Domus offers you maximum flexibility with **three payment systems that can be combined**, allowing you to choose one or more for your laundry or Clean&Move module.

1 DOMUS LAUNDRY KIOSK

Optimise your laundry with contactless payments and remote control. Provide convenience and security for your customers while managing pricing and promotions from anywhere with DOMUSCONNECT.

-  Available in 12" and 32" screens.
-  Enables payments via card or smart device (NFC).
-  Create pricing plans and promotions.
-  Customise it by adding messages or videos.



2 Payment via App DOMUS LAUNDRY

Allows remote machine reservation and payment, helping to build customer loyalty with promotional offers. See page 12 for more details.



Click or tap the button to find out more details about payment options.

3 Payment with COIN / TOKEN

Washers and dryers can include coin/token payment systems in various currencies.



CONNECTIVITY


All DOMUS machines with TOUCH II come with IoT connectivity as standard and free of charge, enabling full remote management to improve efficiency, control, and business operations.

DOMUSCONNECT (IoT): the solution for your laundry

The Internet of Things (IoT) connects everyday objects to the internet, allowing real-time remote control and process optimisation.

DOMUSCONNECT is a free laundry management platform that takes IoT to its full potential, transforming the operations of your OPL or self-service laundry.

With this platform, you can increase efficiency, reduce costs, and enhance your customers' experience from anywhere.

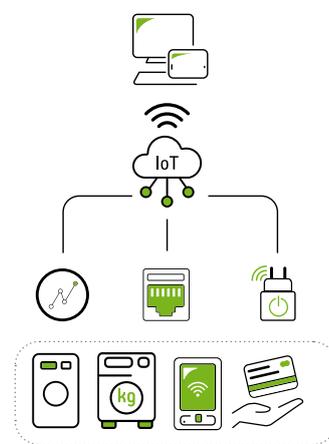

Main features of DOMUSCONNECT



Accessible from any device

Manage your laundry from a computer, tablet, or smartphone.



Free updates

Receive regular new features to keep your business at the forefront.




Highly secure

Advanced security ensures the integrity and confidentiality of your data at all times.



Available in multiple languages

Expanding continuously to suit your needs.

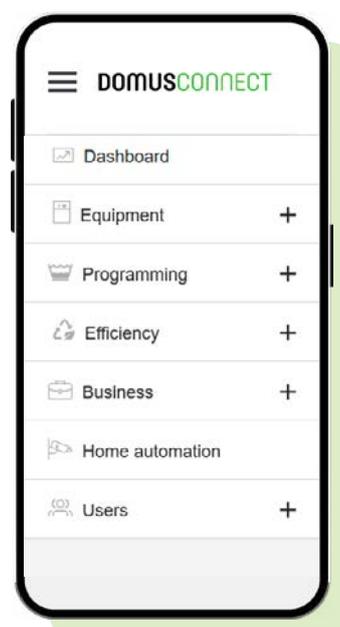

What are the benefits for each profile?



As an owner you can:

- Manage your business remotely, avoiding unnecessary travel.
- Use an intuitive interface to streamline operations.
- Access production reports, cycles, consumption, and revenue data.
- Ensure process control for washing and drying.
- Guarantee hygiene, disinfection, and quality in every cycle.



For your self-service customer, they can:

- Make quick and secure payments via card (new), tokens, or the App.
-  • Enjoy personalised promotions.
-  • Check machine status in real time, avoiding waiting times.
- Operate with an intuitive, user-friendly interface.



For service technicians:

- Provide remote assistance to minimise on-site visits.
-  • Access precise data via the new telemetry system to improve operations.
-  • Perform remote software updates to keep machines up-to-date..



For chemical suppliers:

- Manage and create washing and drying programmes online.
-  • Control chemical dosing via RS-485.
-  • Monitor executed programmes in real time.



As a distributor, you can:

- Leverage the platform to support new business ventures, manage leasing, maintenance contracts, and self-service setups.
- Access detailed databases of installed machines, geographical distribution, and models for efficient management.



ERGONOMICS

As health and safety at work had become an important issue, our equipment is designed to be the most comfortable for the user.

Biggest door diameters in the market

Helpful, mainly for big capacity washers, for loading and unloading the garments.


Easy opening/closing system for door lock

New 180° door opening in all models (high and low spin).

Plinths for 11, 14, 18, 22 and 28 kg models

To align loading height (door base at 850 mm).

Reversible door





MAINTENANCE

One of DOMUS concerns is to make life easier for our clients. That includes offering quality equipment and parts of reputed brands, which demand little maintenance.

Easy access for reparability

Washers are designed to offer an easy maintenance and reparability.

Technical menu

Machine monitoring, machine error warning, management for telemetry and statistics. Remote desk and data recovery for technicians and maintenance, software update, etc.

Equivalent parts

Most key parts are the same for all models (inverters, contactors, electronic devices, gear...).

Increased robustness

New feet as standard in 35 and 45kg.

Hinged panels

Control panel and now also bottom panel can easily be opened for a quick and ergonomic access.



ECOSMART LAUNDRY

by DOMUS

THE LAUNDRY OF THE FUTURE HAS ALREADY ARRIVED.

Domus latest generation, high-performance and connected equipment allows you to manage and monitor resource consumption in real time thanks to cutting-edge technology. Ideal for any type of business and sector.




Add DOMUS washers and ECOTANK XL to your ECOSMART LAUNDRY

And save 40–70% water per cycle with the 1,000-litre ECOTANK XL and integrated weighing system, optimising resources while maintaining outstanding performance.

*Depending on the types of programs, garments and processes.





LEMS by Onnera - Total control of consumption

With the new LEMS pulse concentrator and DOMUSCONNECT (IoT), you can retrieve all the data and analyze the efficiency of your washing machines and the ECOTANK XL such as water, energy and other resources of your industrial laundry.



DOMUSCONNECT

The data collected by LEMS, added to other metrics and values of your laundry, are integrated into the DOMUSCONNECT platform, allowing you to monitor and control your business live and obtain **detailed management, hygiene and efficiency reports**.




Washer extractors technical data

|  HIGH SPIN | | | | | | | | | | | | |
|---|----------------|------------|------------|------------|----------|----------|----------|----------|-----------|-----------|-----------|-----------|
| UNIT. | | DHS-11 | DHS-14 | DHS-18 | DHS-22 | DHS-28 | DHS-35C | DHS-45C | DHS-60C | DHS-80C | DHS-100C | DHS-120C |
| DRUM | | | | | | | | | | | | |
| Load capacity (kg) 1:9 / 1:10 | Kg | 11/10 | 14/13 | 20/18 | 25/22 | 31/28 | 39/35 | 47/42 | 65/59 | 85/77 | 105/95 | 130/115 |
| Volume | l | 100 | 130 | 180 | 220 | 280 | 350 | 420 | 590 | 770 | 950 | 1.150 |
| Diameter | mm | 532 | 620 | 700 | 700 | 770 | 860 | 860 | 1.048 | 1.048 | 1.360 | 1.360 |
| Depth | mm | 425 | 430 | 470 | 560 | 585 | 602 | 720 | 680 | 892 | 637 | 775 |
| GENERAL DETAILS | | | | | | | | | | | | |
| Washing speed / Spining speed | r.p.m. | 50/1.300 | 50/1.204 | 47/1.133 | 47/1.071 | 45/1.024 | 42,5/966 | 42,5/966 | 38/875 | 38/875 | 34/678 | 34/678 |
| G Factor | - | 500 | 500 | 500 | 450 | 450 | 450 | 450 | 450 | 450 | 350 | 350 |
| Noise level | dB | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 |
| Self-service laundry version | - | YES | YES | YES | YES | YES | YES | NO | NO | NO | NO | NO |
| Double drainage | - | NO | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. |
| Weighing System | - | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. |
| Tilting System | - | NO | NO | NO | NO | NO | NO | OPT. | OPT. | OPT. | OPT. | OPT. |
| SLUICE option | - | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| DOOR | | | | | | | | | | | | |
| Height center door / Height base door | mm | 630/370 | 700/440 | 765/450 | 765/450 | 865/560 | 885/540 | 885/540 | 1.170/810 | 1.170/810 | 1.330/900 | 1.330/900 |
| Diameter | mm | 373 | 373 | 460 | 460 | 460 | 560 | 560 | 560 | 560 | 700 | 700 |
| POWER | | | | | | | | | | | | |
| Motor | kW | 0,75 | 1,1 | 2,2 | 2,2 | 4 | 6 | 6 | 15 | 15 | 15 | 15 |
| Electric heating power | kW | 6 | 9 | 12 | 12 | 18 | 21 | 21 | 36 | 48/36 | - | - |
| Total electric power (elec- tric model) | kW | 6,25 | 9,4 | 12,75 | 12,75 | 19,2 | 22 | 22 | 39 | 51/39 | - | - |
| Total electric power (hw, steam model) | kW | 0,75 | 1,1 | 2,2 | 2,2 | 4 | 6 | 6 | 15 | 15 | 15 | 15 |
| CONNECTIONS | | | | | | | | | | | | |
| Steam intake (steam mod.) | inch | 1/2" | 1/2" | 1/2" | 1/2" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 1-1/4" | 1-1/4" |
| Water intake | inch | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 1" | 1" | 1-1/2" | 1-1/2" |
| Drain | inch | 3" | 3" | 3" | 3" | 3" | 3" | 3" | 3" | 3" | 4" | 4" |
| DIMENSIONS | | | | | | | | | | | | |
| Width | mm | 692 | 788 | 884 | 884 | 979 | 1.095 | 1.095 | 1.420 | 1.420 | 1.836 | 1.836 |
| Depth | mm | 830 | 869 | 913 | 1.003 | 1.080 | 1.184 | 1.304 | 1.433 | 1.645 | 1.710 | 1.832 |
| Height | mm | 1.185 | 1.307 | 1.405 | 1.405 | 1.550 | 1.730 | 1.730 | 1.890 | 1.890 | 2.245 | 2.245 |
| Net weight | kg | 198 | 236 | 344,6 | 360 | 524,5 | 735 | 747 | 1.454 | 1.800 | 2.300 | 2.762 |
| PACKING DIMENSIONS | | | | | | | | | | | | |
| Width | mm | 738 | 850 | 945 | 945 | 1.045 | 1.205 | 1.205 | 1.600 | 1.600 | 1.940 | 1.940 |
| Depth | mm | 975 | 1.015 | 1.030 | 1.115 | 1.210 | 1.330 | 1.440 | 1.595 | 1.805 | 2.030 | 2.030 |
| Height | mm | 1.440 | 1.600 | 1.680 | 1.680 | 1.810 | 1.850 | 1.850 | 1.930 | 1.930 | 2.290 | 2.290 |
| Gross weight | kg | 239 | 274,5 | 388 | 403,5 | 548,5 | 786 | 853 | 1.544 | 2.000 | 2.600 | 3.058 |
| Volume | m ³ | 1,03 | 1,38 | 1,63 | 1,77 | 2,28 | 2,7 | 3,3 | 4,9 | 5,6 | 9 | 9 |



LOW SPIN

| | UNIT. | DLS-11 | DLS-14 | DLS-18 | DLS-22 | DLS-28 | DLS-35C | DLS-45C | DLS-60C | DLS-80C |
|---------------------------------------|----------------|---------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| DRUM | | | | | | | | | | |
| Load capacity (kg) 1:9 / 1:10 | Kg | 11/10 | 14/13 | 20/18 | 25/22 | 31/28 | 39/35 | 47/42 | 65/59 | 85/77 |
| Volume | l | 100 | 130 | 180 | 220 | 280 | 350 | 420 | 600 | 800 |
| Diameter | mm | 620 | 620 | 700 | 700 | 770 | 860 | 860 | 1.048 | 1.048 |
| Depth | mm | 330 | 430 | 470 | 560 | 585 | 602 | 720 | 684 | 936 |
| GENERAL DETAILS | | | | | | | | | | |
| Washing speed / Spining speed | r.p.m. | 53/759 | 53/759 | 50/714 | 50/714 | 48/682 | 45/644 | 45/644 | 42,5/505 | 42,5/505 |
| G Factor | - | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 150 | 150 |
| Noise level | dB | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 | < 70 |
| Self-service laundry version | - | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| Double drainage | - | NO | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. | OPT. |
| Weighing System | - | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| Tilting System | - | NO | NO | NO | NO | NO | NO | NO | NO | NO |
| SLUICE option | - | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| DOOR | | | | | | | | | | |
| Height center door / Height base door | mm | 570/310 | 570/310 | 655 / 348 | 655 / 348 | 700 / 400 | 735 / 440 | 735 / 440 | 900 / 540 | 900 / 540 |
| Diameter | mm | 373 | 373 | 460 | 460 | 460 | 560 | 560 | 560 | 560 |
| POWER | | | | | | | | | | |
| Motor | kW | 1,1 | 1,1 | 2,2 | 2,2 | 4 | 4 | 6 | 5,5 | 5,5 |
| Electric heating power | kW | 6 | 9 | 12 | 12 | 18 | 21 | 21 | 36 | 48 |
| Total electric power (electric model) | kW | 6,25 | 9,5 | 12,75 | 12,75 | 19,2 | 22 | 22 | 38 | 50,5 |
| Total electric power (steam model) | kW | 1,1 | 1,1 | 2,2 | 2,2 | 4 | 4 | 6 | 5,5 | 7,5 |
| CONNECTIONS | | | | | | | | | | |
| Steam intake (steam mod.) | inch | 1/2" | 1/2" | 1/2" | 1/2" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" |
| Water intake | inch | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 3/4" | 1" | 1" |
| Drain | inch | 3" | 3" | 3" | 3" | 3" | 3" | 3" | 3" | 3" |
| DIMENSIONS | | | | | | | | | | |
| Width | mm | 719 | 719 | 788 | 788 | 884 | 979 | 979 | 1.225 | 1.225 |
| Depth | mm | 755 | 856 | 935 | 1.035 | 1.075 | 1.155 | 1.325 | 1.315 | 1.492 |
| Height | mm | 1.165 | 1.165 | 1.307 | 1.307 | 1.340 | 1.411 | 1.411 | 1.640 | 1.640 |
| Net weight | kg | 198 | 210 | 272 | 295 | 403 | 476 | 600 | 792 | 871 |
| PACKING DIMENSIONS | | | | | | | | | | |
| Width | mm | 782 | 782 | 850 | 850 | 945 | 1.045 | 1.125 | 1.335 | 1.335 |
| Depth | mm | 890 | 990 | 1.013 | 1.106 | 1.230 | 1.280 | 1.440 | 1.440 | 1.660 |
| Height | mm | 1.400 | 1.400 | 1.583 | 1.583 | 1.583 | 1.655 | 1.640 | 1.860 | 1.860 |
| Gross weight | kg | 231,6 | 245 | 309 | 335 | 431 | 510 | 670 | 878 | 963 |
| Volume | m ³ | 0,97 | 1,08 | 1,36 | 1,5 | 1,84 | 2,2 | 2,6 | 3,6 | 4,12 |

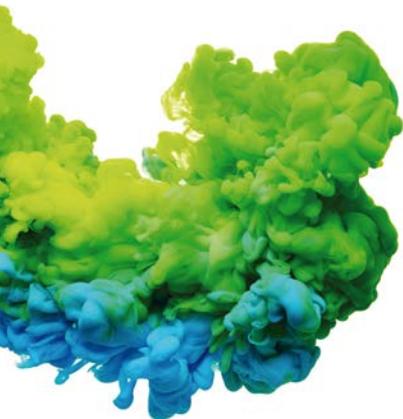

DOMUS

C. Energia, 12 - Pol. Ind. La Quintana
08504 Sant Julià de Vilatorra
BARCELONA (SPAIN)

SALES DEPARTMENT

T. +34 93 888 71 53
M. +34 649 482 730
domus@domuslaundry.com
export@domuslaundry.com

AFTER SALES DEPARTMENT

T. +34 93 888 76 73
sat@domuslaundry.com

PARTS DEPARTMENT

T. +34 93 888 76 83
parts@domuslaundry.com



WWW.DOMUSLAUNDRY.COM

